

PLAN NOTES

- *** ROOM NUMBER, SEE FINISH SCHEDULE SHEET A6. ROOM NUMBERS 102 & 114 ARE NOT USED ON THIS SHEET.
- ⊙ DOOR NUMBER, SEE DOOR SCHEDULE SHEET A5.
- F.E. (E) INDICATES FIRE EXTINGUISHER (10 lb. MULTI-PURPOSE/UL RATED 4A-80B:C) IN A SEMI-RECESSED RATED CABINET PROVIDE ENGLAGE MONITORING SYSTEM OR APPROVED EQUAL.
- F.E. (E) INDICATES FIRE EXTINGUISHER (10 lb. MULTI-PURPOSE/UL RATED 4A-80B:C) IN WALL MOUNTED BRACKET PROVIDE ENGLAGE MONITORING SYSTEM OR APPROVED EQUAL.
- PROX INDICATES PROXIMITY CARD READER LOCATION.
- MONITOR/SCREEN/TV MONITOR, SCREEN OR TELEVISION AS OCCURS, PROVIDED BY TENANT, INSTALLED BY G.C. PROVIDE 3/4" PLYWOOD BLOCKING IN WALL, COORDINATE WITH TENANT FOR SIZE & HEIGHT.
- ↓ DIM. INDICATES DIMENSION IS TO FACE OF STUD.
- ↑ DIM. INDICATES DIMENSION IS TO FACE OF FINISHED WALL.
- FOR GLAZED WALL DETAILS, SEE 2/A5.
- △ INDICATES WALL TYPE, SEE WALL TYPES LEGEND, THIS SHEET, FOR SPECIFIC WALL TYPE INDICATED BY THE SYMBOL SHOWN.

WALL TYPE LEGEND

1. USE MOISTURE RESISTANT GPDW BEHIND ALL PLUMBING FIXTURES.
 2. BOX OUT ALL COLUMNS IN FINISHED AREAS TO MATCH ADJACENT WALL CONSTRUCTION. FREE STANDING COLUMNS SHALL RECEIVE 5/8" GPDW ON 1 5/8" 25 GA. METAL STUDS FINISH FLOOR TO 4" ABOVE FINISHED CEILING.
- TYPICAL INTERIOR WALL CONSTRUCTION (UNLESS NOTED OTHERWISE):
 5/8" GPDW EACH SIDE OF 3 5/8" 25 GAUGE METAL STUDS
 @ 16" o.c. FINISH FLOOR TO 4" ABOVE FINISH CEILING WITH 3 1/2" SOUND ATTENUATION BATT INSULATION
- △ 5/8" GPDW EACH SIDE OF 3 5/8" 20 GA. METAL STUDS @ 16" o.c. WITH 3 1/2" UNFACED FIBERGLASS BATT INSULATION, FIN. FLR. TO UNDERSIDE OF ROOF/FLOOR DECK/ STRUCTURE.

REV. NO.	REVISIONS	DATE

PROJECT: **LOFTWARE**
TENANT IMPROVEMENTS TO 249 CORPORATE DRIVE
 NEW HAMPSHIRE
 PORTSMOUTH.


SUBJECT: **FIRST FLOOR PLAN**

DATE: 03/20/15

SCALE: 1/8"=1'-0"

UDELSMAN ASSOCIATES
 ARCHITECTURE • PLANNING • DESIGN

161 FEDERAL HILL ROAD
 HOLLIS, NEW HAMPSHIRE 03049
 603-465-6960 FAX 465-6961

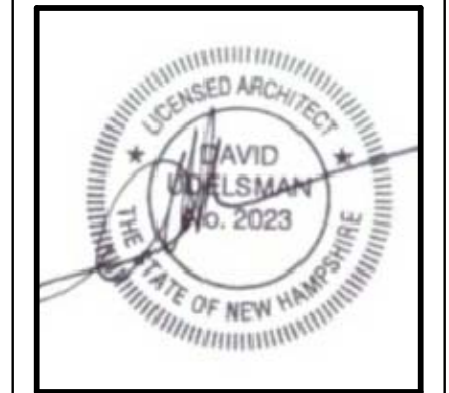

PROJECT NO.: **1432**

SHEET NO.: **A1**

